



Seal set Shuttle Valve Type W/DV

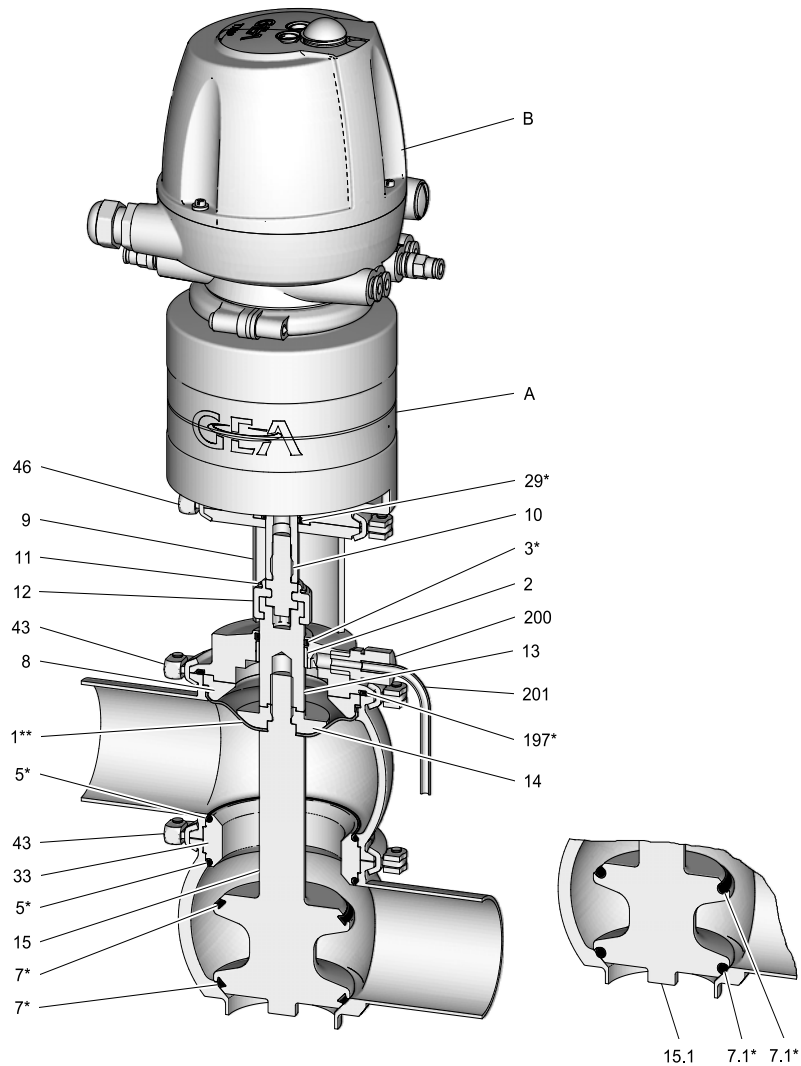

Spare Parts Drawing

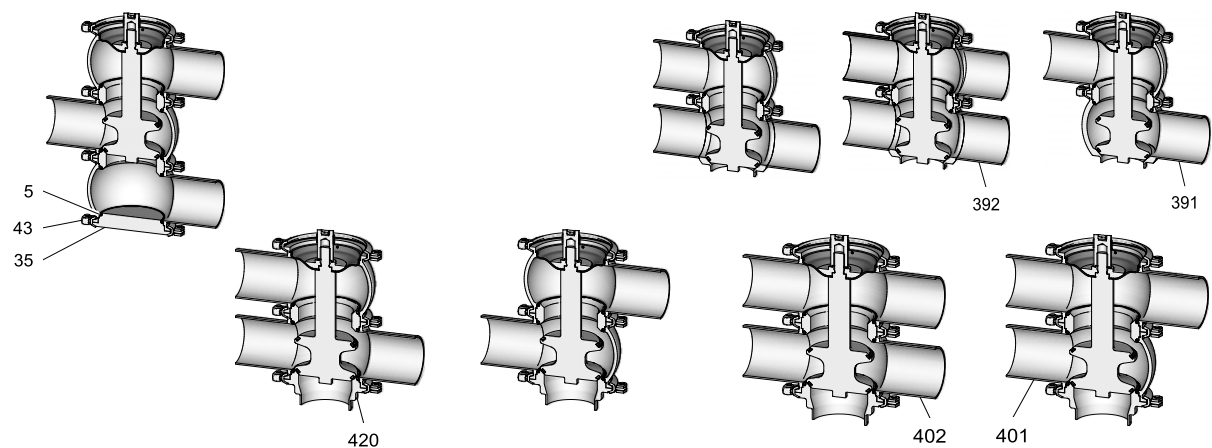

Housing combinations

Seals for Shuttle Valve W/DV

Item	Qty	Designation	Material	DN 25 1" OD	DN 40/50 1.5"/2" OD	DN 65/80 2.5"/3" OD	DN 100 4" OD
Sealing set cpl.			EPDM	221-742.01	221-742.02	221-742.03	221-742.04
			FKM	221-742.05	221-742.06	221-742.07	221-742.08
			HNBR	221-742.09	221-742.10	221-742.11	221-742.12
			TEFASEP gold/EPDM	221-742.13	221-742.14	221-742.15	221-742.16
			TEFASEP gold/VMQ	221-742.17	221-742.18	221-742.19	221-742.20
3	1	O-ring	Ø EPDM	22x3 930-268	22x3 930-268	28x3 930-243	28x3 930-243
5	2	O-ring	Ø EPDM FKM HNBR	42x3 930-309 930-168 930-632	60x3 930-144 930-171 930-633	85x4 930-150 930-176 930-634	113x4 930-156 930-178 930-863
***7	2	V-ring	Ø EPDM FKM HNBR	35-5 932-046 932-030 932-087	52-6 932-021 932-033 932-088	76-6 932-024 932-035 932-090	104-6 932-028 932-039 932-100
7.1	1	O-Ring	Ø TEFASEP gold	30,5x5 930-100	48,0x5 930-101	69,6x6 930-102	94,8x6 930-103
29	1	O-ring	Ø NBR	20x3 930-026	20x3 930-026	20x3 930-026	20x3 930-026
197	1	O-ring	Ø EPDM	50.52x1.78 930-496	68x2 930-788	92x3 930-152	122x3 930-789
Grease RIVOLTA F.L.G MD-2 100g tube not included in the sealing set						413-136	

*** Do not grease item 7

Storing instructions: storage in accordance with DIN 7716

Relative humidity approx. 65%, temperature 15-25°C and protected from light

When replacing seals, observe the instructions in the Operating Instructions!