



HEAT SHIELDS

USE OF HEAT SHIELDS FOR TEMPERATURE REDUCTION


Heat Shields are typically used to reduce the process temperature to which a rupture disc is exposed. This may be necessary when the rupture disc is manufactured from materials which are not capable of withstanding high process temperatures. Heat Shields are used where fluoropolymer or other exotic material liners are required for corrosion resistance or as part of the rupture disc itself in combination with high process temperature.

The C.D.C. Heat Shield is constructed as a flat metal component for direct installation between bolted pipe flanges upstream of the rupture disc. It is slotted to allow the transmission of pressure to the rupture disc and to provide full opening upon bursting of the rupture disc. It functions as a barrier restricting the continuous flow of high-temperature gases or vapors. This allows the piping between the Heat Shield and rupture disc to act as a heat sink to the dead space and effectively reduce the temperature to which the rupture disc is exposed.

There are many factors which must be considered in evaluating the required length of the spool assembly to achieve an adequate heat sink. Therefore, no single rule can be suitable for all of the possible applications. The actual temperature drop is best determined by the end user taking into consideration the following design parameters.

- Maximum (rated) temperature of the rupture disc.
- The maximum expected temperature exposed to the exterior of the assembly. (Note that the rupture disc and spool assembly can not be insulated.)
- Attachment of other exterior cooling devices.
- Process media.

- Total surface area of the spool assembly and rupture disc.
- The transmission of heat to rupture disc by radiation, conduction, and convection.

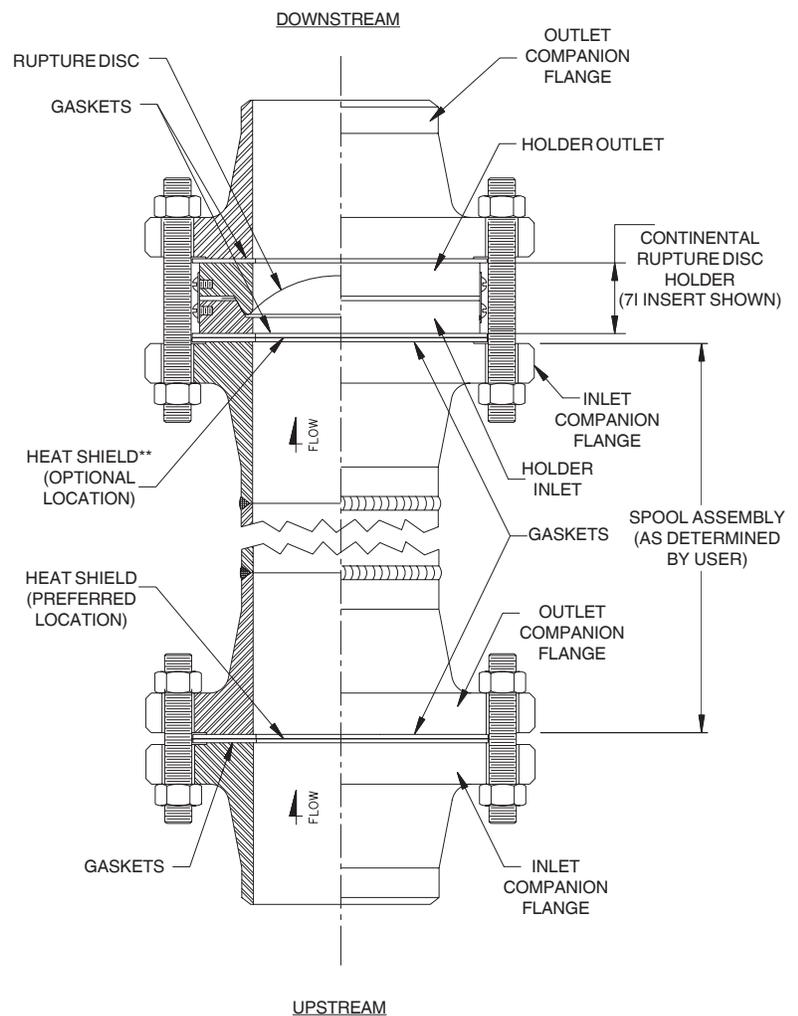

**For reverse-buckling type rupture discs, the Heat Shield cannot be located directly under the holder inlet.

Heat Shields are available in the sizes and mating flange classes listed below.

Table I. Sizes and Flange Ratings for C.D.C. Heat Shields

SIZE (INCHES) (MM)	ANSI CLASS	DIN CLASS	JIS CLASS	SIZE (INCHES) (MM)	ANSI CLASS	DIN CLASS	JIS CLASS
1	150	10/40	10/20	14	150	10	5
25	300/600	—	30/40	350	300	16/25	10/20
1.5	150	10/40	10/20	16	150	10	5
40	300/600	—	30/40	400	300	16/25	10/30
2	150	10/40	10/40	18	150	—	5
50	300/600	64	64	450	300	—	10
3	150	10/40	10/20	20	150	10	5
80	300/600	64	30/40	500	300	16/25	10/20
4	150	10/16	10/20	24	150	6/10	5/10
100	300	25/40	30/40	600	300	10/25	16/20
6	150	10/16	10	30	150	—	5
150	300	25/40	16/20	750	—	—	10
8	150	10/16	10	32	150	—	5
200	300	25	16/30	800	—	—	10
10	150	10/16	10	36	150	—	5
250	300	25	16/30	900	—	—	10
12	150	10	5				
300	300	16/25	10/20				

For additional sizes and mating flange classes not shown, consult your Continental Disc representative or the factory.

Continental Disc Corporation has representatives located throughout the world.
Contact the C.D.C. office nearest you for the authorized representative in your area.

CORPORATE HEADQUARTERS

Continental Disc Corporation
3160 W. Heartland Drive
Liberty, MO 64068-3385 USA

Phone: (816) 792-1500
FAX: (816) 792-2277 / 5447
E-mail: pressure@contdisc.com
Website: www.contdisc.com

THE NETHERLANDS

Continental Disc Corporation
Energieweg 20
2382 NJ Zoeterwoude-Rijndijk
The Netherlands
Phone: + (31) 71-5412221
FAX: + (31) 71-5414361
E-mail: odcnl@contdisc.com

GERMANY

Continental Disc Deutschland GmbH
Virmondstrasse 151
47877 Willich
Germany
Phone: + (49) 2156-490802
FAX: + (49) 2156-492547
E-mail: cdd@contdisc.com

UNITED KINGDOM

Continental Disc UK Ltd.
Unit C, The Business Centre
Faringdon Avenue,
Harold Hill, Romford
Essex RM3 8EN
United Kingdom
Phone: + (44) 1708-386444
FAX: + (44) 1708-386486
E-mail: cduk@contdisc.com

CHINA

Continental Disc Corporation
2026 The Executive Center
20/F The Center
989 Changle Rd.
Shanghai, 200031
P.R. China
Phone: + (86) 21-5117-5848
Fax: + (86) 21-5117-5849
Mobile: + (86) 137-8897-2291
E-mail: jjyang@contdisc.com

DUBAI

Continental Disc Corporation
P.O. Box 2234
Dubai, U.A.E.
Phone: + (971) 43214490
FAX: + (971) 43438840
Mobile: + (971) 508129525
E-mail: kannan@contdisc.com